Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

SPECIFICATION SHEET

DATE: JUN.01,98'
NO. : SS98060101
PAGE: 1/2

CUSTOMER NAME :
TYPE: HN-GH27GM TYPE
MODEL NO. : HN-GH12-1045Y
CUSTOMER PART NO.:

Jameco Part Number 153437

I. SPECIFICATIONS A :

1. RATED VOLTAGE : DC 12V
2. DC VOLTAGE OPERATING RANGE : DC 3 - 12V
3. TORQUE(LOAD) AT MAXIMUM EFFICIENCY : MAX 0.8 Kg-cm
4. STALL TORQUE : MAX 0.8 Kg-cm
5. NO LOAD SPEED: 15 RPM
6. SPEED AT MAXIMUM EFFICIENCY(UNDER LOAD AT 0.50 Kg-cm) : 7 RPM
7. NO LOAD CURRENT : MAX. 35 mA
8. CURRENT AT MAXIMUM EFFICIENCY(UNDER LOAD AT 0.50 Kg-cm) : MAX. 90 mA
9. SHAFT END PLAY : 0.8 M/M
10. STARTED TORQUE : MAX 0.8 Kg-cm
11. INSULATION RESISTANCE : 10 M OHM
12. DIELECTRIC STRENGTH : 300V DC
13. MAXIMUM PERCENT EFFICIENCY : 50%
14. DIRECTION OF ROTATION : "CCW" WHEN VIEWED FROM OUTPUT SHAFT SIDE.
15. GEAR RATIO: 200:1

SPECIFICATION SHEET

DATE: JUN.01,98'
NO. : SS98060101
PAGE: 2/2

CUSTOMER NAME :
TYPE: HN-GH27GM TYPE
MODEL NO. : HN-GH12-1045Y
CUSTOMER PART NO.:

II. OUTTER DIMENSIONS :

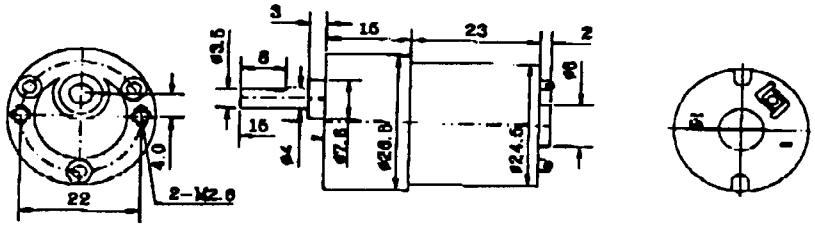

III. GEAR RATIO : 200:1

	B	C	D	E
9	22	70	200	325
15	15	15	15	15
81	73	66	59	59
0.5	0.5	0.7	1	1